

HOGUE®

INSTALLATION INSTRUCTIONS FOR EXTREME™ HOGUE AR GRIPS



HOGUE, INC.

Post Office Box 91360
Henderson, NV 89009

1-800-GET-GRIP (438-4747)

Hogueinc.com


**IMPORTANT CONSUMER
AND WARRANTY INFORMATION
ON BACK OF PACKAGE**

ord_ins_argripext_02022017


1. Before starting to work, **MAKE SURE THE FIREARM IS UNLOADED.** Remove existing grip. **CAUTION:** Selector spring and selector detent may release from firearm upon grip removal. Do not lose these small parts!

2. Slip grip into position on the firearm.

3. Snugly fit grip into position on rifle. **CAUTION:** If necessary, carefully reinsert selector spring and selector detent. Ensure proper fit in both the grip and the rifle to prevent damage to spring.

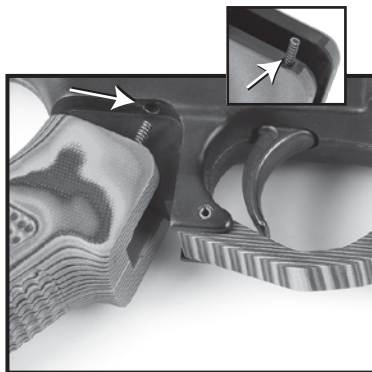

4. Using the appropriate tool, tighten grip onto rifle.

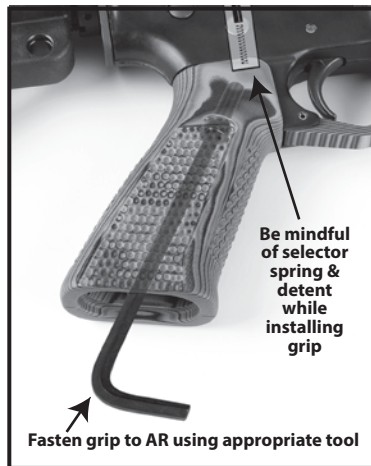

IMPORTANT!

Check all functions of your firearm after grips are installed. **Test-fire your firearm.** This is especially important if weapon is to be used for law enforcement duty.

A FEW WORDS ABOUT FIT

It is a fact that firearm receiver dimensions vary from firearm to firearm. No grip is shipped unless it fits and functions on **our** guns properly. Please keep this in mind.

It is imperative to make sure that every firearm functions properly with after-market grips installed. Although the grip functions properly on our firearms, it is the user's responsibility to check all functions of a firearm after new grips are installed. This is especially important if the weapon is to be used for law enforcement duty. If you do not feel competent to check the proper function yourself, we suggest visiting your gunsmith to check this for you.

It is important to test-fire a rifle fitted with new grips before using it in the field.